


Product Overview

The NTE 5B is an approved method for terminating 2 wire copper lines using BT style connectivity. It features a removable Customer Connection Unit that provides a clear demarcation between the network operator's and customer's wiring. No socket is provided on the front, only hardwired connection is available

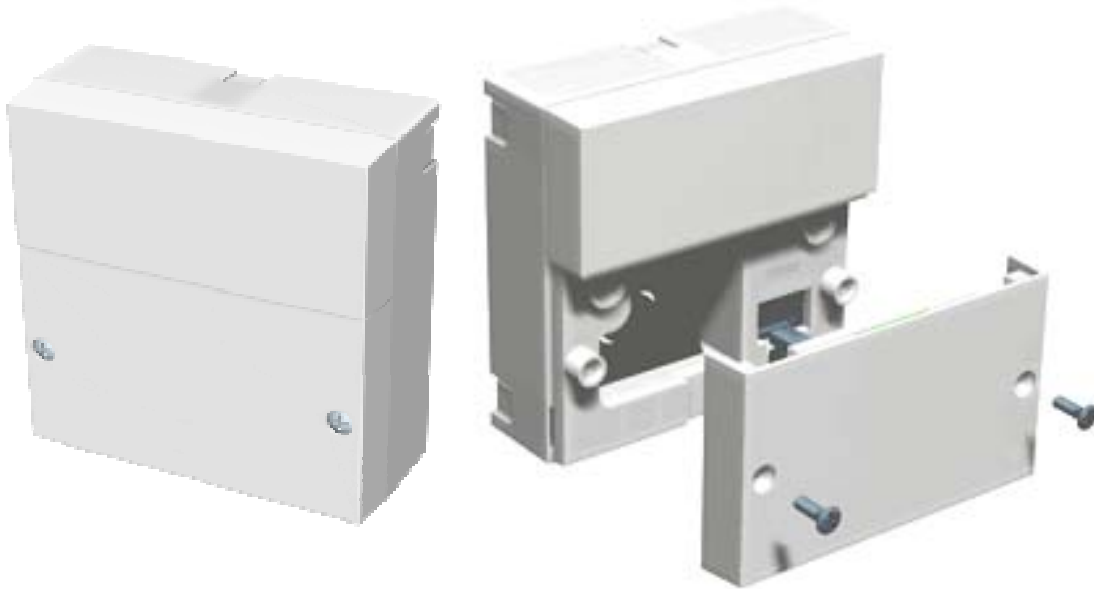

data sheet

Product Description

The NTE 5B is designed to terminate single copper pair lines in the customer premise.

- Plastics moulded from V0 rated PVC
- 2 way IDC connection of incoming network operator's wiring (LSA style)
- Standard linetest and ringing components provided
- 26A Overvoltage protection included
- 401A Test socket to verify network wiring is good
- 4 way IDC connector for onward distribution of customer's wiring (LSA style)

It is accepted within the UK by all network operators that the NTE5 is the preferred method of terminating single pair copper lines within the customer premise.



DS 024-2 Network Terminating Equipment 5B (NTE 5B)

Pressac Part Number R20/7984/XXXXX

Circuit Diagram

Network wiring IN

Customer wiring OUT

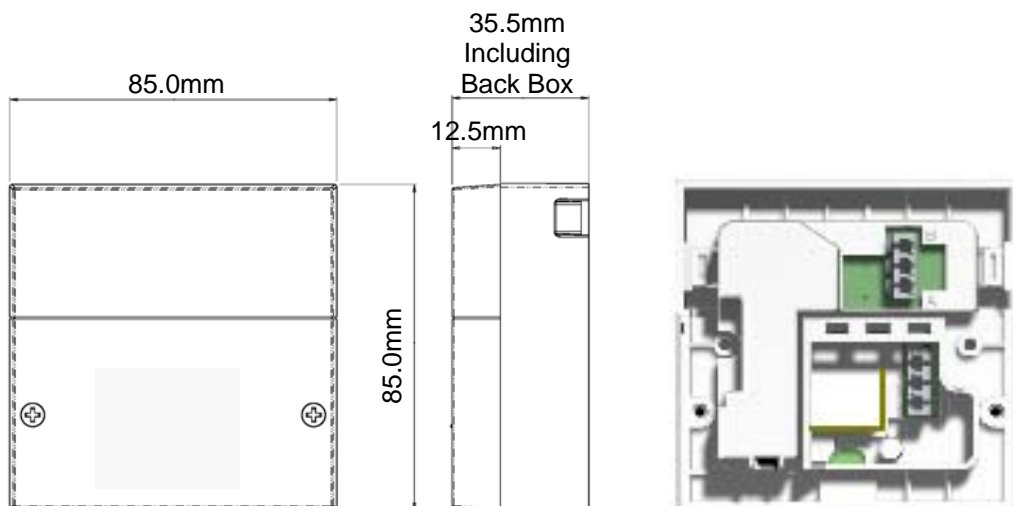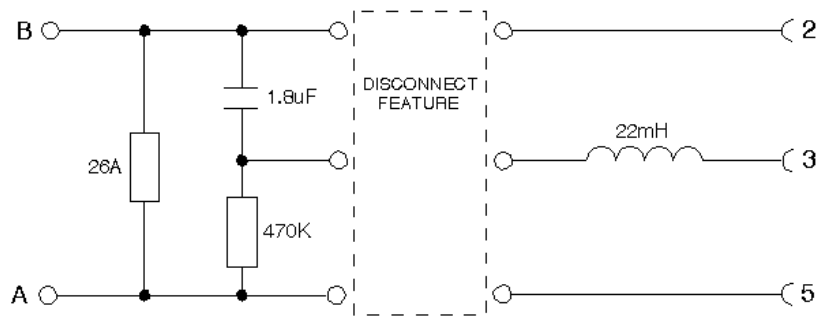

Features and benefits

- Provides clear demarcation point between network and customer wiring
- Can be surface mounted (with backbox) or flush mounted
- Bellwire filter provided
- M3.5 screws provided
- Will accept other Service Specific Frontplates (SSFPs) such as the ADSL Centralised Filter
- No 601A socket – ideal for hard wired installations

Pressac Communications Limited

Glaisdale Drive West, Bilborough, Nottingham NG8 4GY

Tel: +44 (0)115 936 5258 Fax: +44 (0)115 936 5252

E-mail: sales@presscomm.co.uk

Technical Support

Tel: +44 (0)115 936 5238

E-mail: tech_support@presscomm.co.uk



The Pressac website www.presscomm.co.uk has further information on our company, services and products

data sheet