
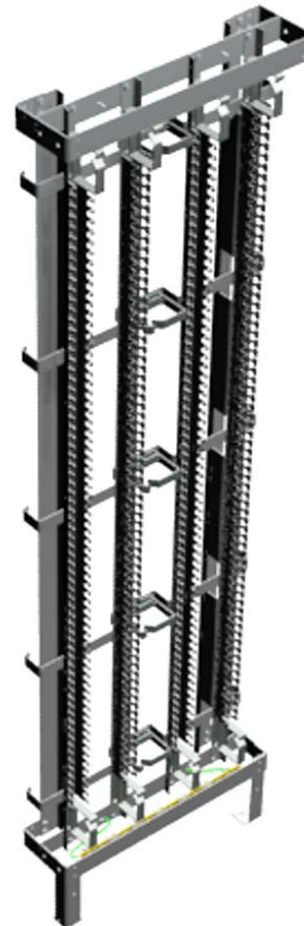


The Pressac 108A Distribution Frame is a double vertical, modular distribution frame compatible with older style industry standard frames such as the 105, 108 and 111B. It is designed to terminate upto 138 industry standard LSA style 10 pair disconnection strips offering an overall capacity of 1380 pairs

SPECIFICATIONS

| | | |
|----------|---------------------------|--------------|
| Material | Chassis | Mild Steel |
| | Mountings | Chrome Steel |
| | Jumper Rings | Black FR ABS |
| Finish | Low Gloss Black Polyester | |
| Weight | 25Kg | |
| Capacity | 2 Columns 690 Pair = 1380 | |

OVERALL DIMENSIONS

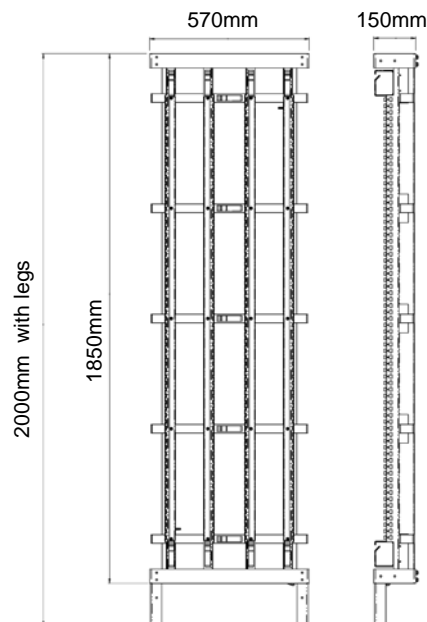

Frame 108A

Frame Distribution 108A is a two vertical, modular distribution frame offering up to 1380 pairs capacity when using Strips Connection 237A.

Modular construction means that the units may be assembled side-by-side for wall mounting, or back-to-back for free-standing applications.

Cable management is provided using by large jumper rings fitted top, bottom and between terminal banks, whilst individual terminal blocks are provided with fixed fanning strips.

Earthing is provided via a heavy copper earth commoning bar fitted to the bottom of the frame and running the full width of the frame

Adjustable legs allow for uneven flooring, or may be removed where height is a limitation.

Pressac Communications Limited

Glaisdale Drive West, Bilborough, Nottingham NG8 4GY
 Tel: +44 (0)115 936 5258 Fax: +44 (0)115 936 5252
 E-mail: sales@presscomm.co.uk

Technical Support

Tel: +44 (0)115 936 5238
 E-mail: tech_support@presscomm.co.uk



The Pressac website www.presscomm.co.uk has further information on our company, services and products

data sheet